


EN
GR84*

MAVIG

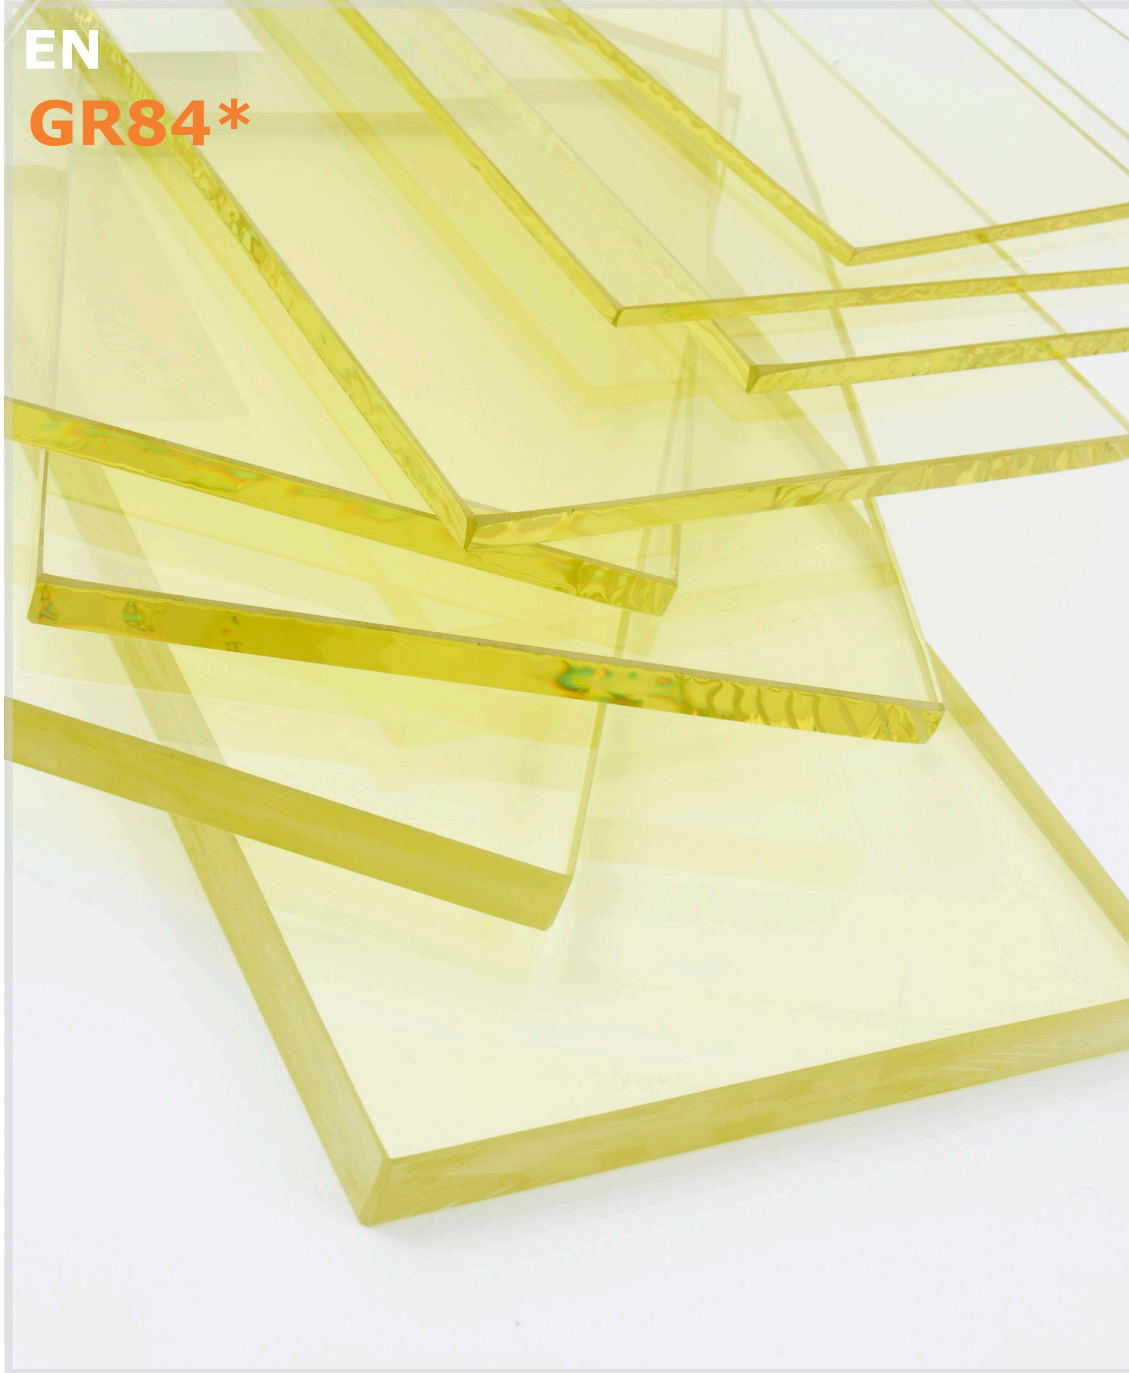

Article-No.: GR8405 X-ray radiation shielding lead glass with 0.50 mmPb (only for mammography/analytic devices)

Made in Germany

GR8405 – Technical Data - Radiation Shielding Lead Glass

Radiation protection lead glass (0.50 mmPb) only for mammography and analytic devices.
The Pb values have been measured at 120 kV. Non-standard sizes, cuts and other lead equivalents available upon request.

- **Optical properties** Refractive index n_d at 20°C (annealed at 40°C/h) 1.579
Luminous transmittance (d = 6.0 mm) 90.5 %
- **Chemical properties** Hydrolytic resistance according to DIN ISO 719 HGB 3
Lead oxide content (PbO) ≥ 22 %
Heavy metal oxide content in total ≥ 23 %
- **Mechanical properties** Density in g/cm³ (delivered condition) ≥ 3.13
- **Processing** The surface of the glass is polished and all edges are chamfered.

Thickness in mm	Attenuation equivalent in mmPb at a tube voltage of:						Max. Weight in kg/m ²
	50 kV	56 kV	76 kV	80 kV	110 kV	150 kV	
6.0 ± 0.25	≥ 0.5	≥ 0.5	≥ 0.5	≥ 0.5	≥ 0.5	≥ 0.5	20

MAVIG GmbH
X-Ray Protection and
Medical Suspension Systems

Stahlgruberring 5
81829 Munich
Germany

PO Box 82 03 62
81803 Munich
Germany

Phone +49 (0) 89 / 420 96 - 0
Fax +49 (0) 89 / 420 96 - 200
e-Mail info@mavig.com