


EN


TS15\*

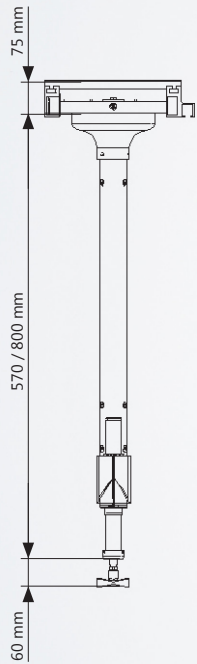

PORTEGRA<sup>2</sup>

360° Ceiling Column for Track Systems

TS20\*

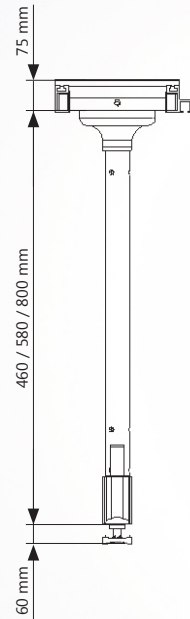

PORTEGRA<sup>2</sup>

Twin Ceiling Column for Track Systems

MAVIG



**Models:** TS2031/32 360° column with carriage (for column lengths refer to table below)  
 TS1501/02/03 Twin column with carriage (for column lengths refer to table below)


Made in Germany


IEC 60601-1

## MAVIG Track Columns with Carriage – 360° and Twin

Solid construction for maximum safety. Many years of development has led to MAVIG's unique steel columns. The proven construction, sturdy design, and numerous tests ensure the highest level of safety available.

The patented brake mechanism is a standard for all support systems with a carriage. The brake holds the carriage at a fixed position inside the ceiling track, which provides additional safety during its use.

MAVIG columns are equipped standard with one electrical pin  for a direct connection to a lamp.

- Each pin offers a 235° rotation (360° for the lower pin of the 360° column)
- One electrical connection: One 3-pole sliding contact 
- Net load at spring arm adapter: Max. 18.0 kg (39.7 lbs) per pin (depending on length)
- Different lengths to match room height

Article-No.	360° Length*	Article-No.	Twin Length*
TS2031	800 mm	TS1501	800 mm
TS2032	570 mm	TS1502	580 mm
		TS1503	460 mm

\* Ceiling column lengths are measured from the top of the mounting flange to the bottom of the column structure.  
 For a total length when installed, 75 mm needs to be added for the track and 60/80 mm for the brake handle.

**MAVIG GmbH**  
 X-Ray Protection and  
 Medical Suspension Systems

Stahlgruberring 5  
 81829 Munich  
 Germany

PO Box 82 03 62  
 81803 Munich  
 Germany

Phone +49 (0) 89 / 420 96 - 0  
 Fax +49 (0) 89 / 420 96 - 200  
 e-Mail info@mavig.com